




" FALCOSTOR " , SERIES 20 .

Art.no.	Shelter, Dimension:
20.443.000	roof 2220x2220 mm, 2 back and 2x1 side panels
20.445.000	roof 3280x2220 mm, 3 back and 2x1 side panels
20.447.000	roof 4340x2220 mm, 4 back and 2x1 side panels
20.449.000	roof 5400x2220 mm, 5 back and 2x1 side panels
20.645.000	roof 3280x2750 mm, 3 back and 2x2 side panels
20.647.000	roof 4340x2750 mm, 4 back and 2x2 side panels
20.649.000	roof 5400x2750 mm, 5 back and 2x2 side panels
Art.no.	Benches
20.940.000	with hardwood slats, long 1060 mm
20.941.000	with hardwood slats, long 1590 mm
20.942.000	with hardwood slats, long 2120 mm
20.944.000	with hardwood slats, long 3180 mm
20.946.000	with hardwood slats, long 4240 mm

Art.no. 20.645.000

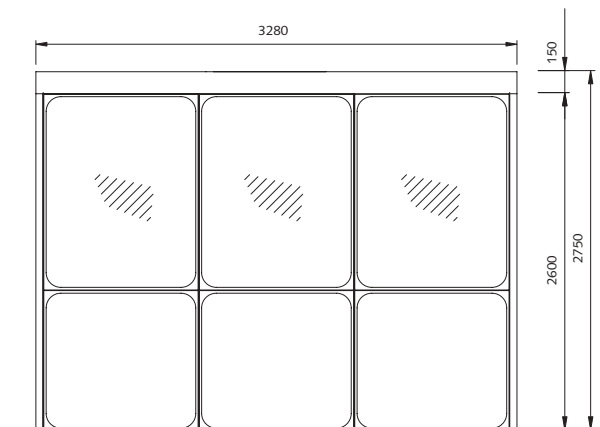

N.B. If necessary, send us a sketch plan. A lot is possible with the module system.

1 " FALCOSTOR " , SERIES 20 .

The shelters shown are increasingly popular because of their sturdy construction, the design, the long lifespan, their functionality and the low price. The model can be identified immediately by the rounded corners on the wall elements.

The standard version comprises:

- The roof element; made of Falco moulded section which serves as gutter and fascia board with a height of 150 mm. The roof covering consists of aluzinc sheet filling corrugated metal sheets. Rainwater drainage via roof discharge with down pipe.
- Available in 4 depths: 1160, 1690, 2220 or 2750 mm.
- The uprights; made of 50x50x2.5 mm tubular section.
- The wall elements; available in 2 widths.

The widths are 530 and 1060 mm, the height is 2300 mm. Made of 40x20x4 mm angle iron and 40x40x4 mm T-section. Partition creates a bottom panel and a top panel.

The bottom panel is fitted with a 2 mm thick powder-coated aluminium plate and the top panel is fitted with 6 mm thick clear float glass. The panel fillings are attached with neoprene frame strips.

The standard article numbers have back wall panels and 2x1 side panels or 2x2 side panels with a depth of 2750 mm.

The series 20. offers many variations and applications. To list a few: bus shelter, cycle shelter, waiting area, ATM shelter, pump shelter and combinations of the above.

For the option of cycle shelter we advise a roof depth of 2750 mm. For the waiting area we can provide special benches for an additional charge

In addition to the standard wall filling, they can also be fitted with safety glass, polycarbonate, aluminium plate above, colour powder-coated, with sidings etc..